


AC3 HD IP PTZ Camera



Features

- 1/2.8" CMOS, 2.14MP, 30X/20X optical zoom;
- H.265 video compression, dual Stream;
- ONVIF, RTSP compliant;
- Simultaneous video outputs of standard definition and high definition;
- Efficient 60m IR distance;
- Wide dynamic range, ICR day/night;
- Image stabilization;
- Waterproof index: IP66;
- Precise PTZ system with high holding torque, PTZ positioning precision up to +/-0.2°;
- Remote network upgrade, easy maintenance;
- 10.8~28V voltage input;
- Auto power-off with low power supply.

Dimensions

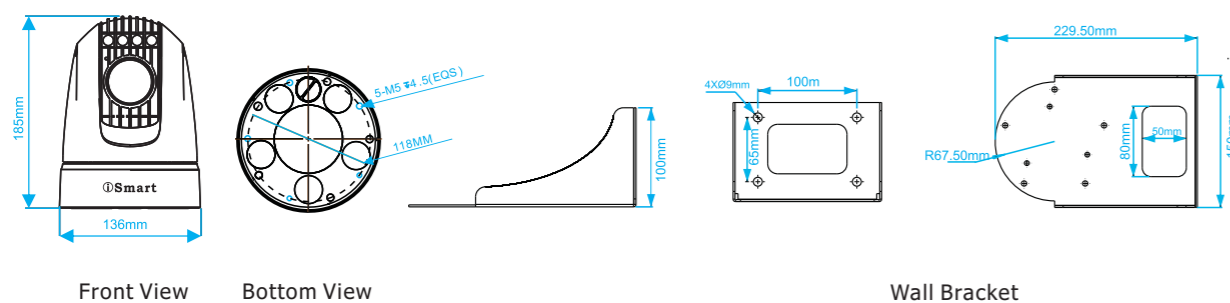

AC3 HD IP PTZ Camera

Model	AC3-S2008N-IR	AC3-S3001N-IR
Camera		
Image Sensor	1/2.8" Progressive Scan CMOS, 2.14MP	
Active pixel	1920(H) x 1080(V)	
Signal system (HD)	1080p/30, 1080p/25, 720p/60, 720p/50, 720p/30, 720p/25	
Signal system (SD)	PAL / NTSC	
Min Illumination	Color: 0.05Lux; B/W: 0.001Lux	Color: 0.19Lux; B/W: 0.002Lux
WB	Auto	
Focus	Auto / Manual	
Exposure Control	Auto / Manual	
S/N Ratio	Not less than 50DB	
BLC	On / Off	
WDR	On / Off	
Digital Noise Reduction	1- 5 Steps / OFF	
D/N ICR	Auto / Manual	
Lens		
Optical Zoom	20X	30X
Digital Zoom	12X	
Focal	f=4.7mm~ 94mm	f=4.3mm~129mm
IRIS	F1.6 ~ F3.5	F1.6 ~ F4.7
View Angle	59.5° (H) ~ 3.3° (V)	63.7° (H) ~ 2.3° (V)
PTZ		
Pan Range	360° Continuous	
Pan Speed	Control Speed: 0.1° ~ 60°/s, Adjustable; Preset Speed: 60°/s	
Tilt Range	-15° ~ 90° (Auto Flip)	
Tilt Speed	Control Speed: 0.2° ~ 60°/s, Adjustable; Preset Speed: 60°/s	
Preset No	256	
Preset Precision	±0.2°	
IR Light		
IR Wave Length	850nm	
Range	60m	
Switch	Auto / Manual	
Network		
Max. Image Resolution	1920 * 1080	
Max. FPS	50Hz: 1080p25 / 720p50 / 720p25 60Hz: 1080p30 / 720p60 / 720p30	
Image Compression	H.264, H.265	
Audio Compression	AAC	
Protocols	HTTP, RTSP, RTP, TCP, UDP, ONVIF	
No. of Users Access	Up to 10	
Dual Stream	Yes	
Interface		
Audio Input	One Channel In, Line Input, Audio Peak: -2.4V[p-p];	
Audio Output	One Channel Out, Impedance: 600Ω	
Video Output (SD)	CVBS1.0V[p-p]/75Ω, PAL or NTSC	
Ethernet Interface	RJ45, 10 / 100M	
Comm. Interface	RS-485	
General		
Menu Language	English	
Address	0 ~ 255	
Comm Protocol	PELCO-P / PELCO-D (Self-Adaptive)	
Baud Rate	2400bps, 4800bps, 9600bps, 19200bps (Self-Adaptive)	
Voltage	DC10.8 ~ 28V	
Power	Min: 9W; Max: 20W	
Working Temperature	-30°C ~ +65°C	
IP Index	IP66	
Other Protection	TVS	
Dimension	Φ136(mm)×185(mm)	
Weight	2.1kg	