


AC3 Analog PTZ Camera



Features

- Aluminum housing;
- IP66 weatherproof;
- Digital image stabilization;
- Efficient 60m IR distance;
- Wide range of voltage input;
- Sony 28x / 36x zoom module, D/N;
- Self-adaption of protocol & baud rate;
- Image flip for stand / suspended installation;
- Precise PTZ system with high holding torque, PTZ positioning precision up to +/-0.2°.

Dimensions

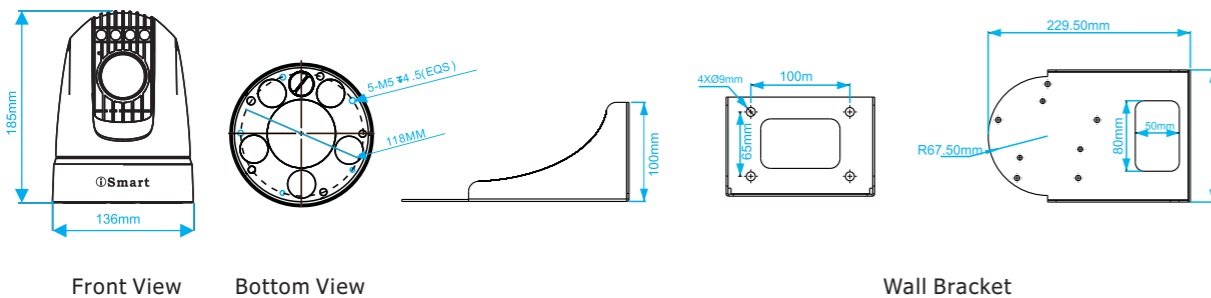

AC3 Analog PTZ Camera		
Model	AC3-S3603S-IR	AC3-S2801S-IR
Camera		
Image Sensor	1/4" SONY EX-View HAD CCD	
Effective Pixel	PAL: 752(H) × 582(V); NTSC: 768(H) × 494(V)	
Video Format	PAL / NTSC	
Min Illumination	Color: 0.1Lux; B/W: 0.01Lux	Color: 0.16Lux; B/W: 0.0015Lux
WB	Auto	
Focus	Auto / Manual	
Exposure Control	Auto / Manual	
S/N Ratio	Not less than 50DB	
BLC	On / Off	
WDR	On / Off	No
Digital Noise Reduction	1~5 Steps / OFF	
D/N ICR	Auto / Manual	
Lens		
Optical Zoom	36X	28X
Focal	f=3.4mm ~ 122.4mm	f=3.5mm ~ 98mm
IRIS	F1.6 ~ F4.5	F1.35 ~ F3.7
View Angle	57.8° (H) ~ 1.7° (V)	55.8° (H) ~ 2.1° (V)
PTZ		
Pan Range	360° Continuous	
Pan Speed	Control Speed: 0.1° ~ 60°/s, Adjustable; Preset Speed: 60°/s	
Tilt Range	-15° ~ 90° (Auto Flip)	
Tilt Speed	Control Speed: 0.2° ~ 60°/s, Adjustable; Preset Speed: 60°/s	
Preset No	256	
Preset Precision	±0.2°	
IR Light		
IR Wave Length	850nm	
Range	60m	
Switch	Auto / Manual	
General		
Menu Language	English	
Comm Interface	RS-485	
Address	0 ~ 255	
Comm Protocol	PELCO-P / PELCO-D (Self-Adaptive)	
Video Output	CVBS	
Baud Rate	2400bps, 4800bps, 9600bps, 19200bps (Self-Adaptive)	
Voltage	DC10.8 ~ 28V	
Power	Min: 9W; Max: 20W	
Working Temperature	-30°C ~ +65°C	
IP Index	IP66	
Other Protection	TVS	
Dimension	Φ136(mm)×185(mm)	
Weight	2.1kg	